

9/125 SSF™ Single Mode OS2 24 - 144 Strand Cable Micro Distribution Riser / Plenum I/O / LSZH


Type: OS2, OFNR, CSA FT4 / OFNP, CSA FT6 / LSZH, G.657.A2, G.657.N2, N.652.D



Cleerline SSF™ 24-144 strand fiber Micro Distribution cable is composed of 2 to 12 distribution style subunits and optional strength member contained in an overall Riser, Plenum, or LSZH jacket.

SSF™ Micro Distribution is ideal for inter-building or intra-building data communication backbones.

Cleerline SSF™ Micro Distribution Single Mode is fully compatible with all common connector systems for standard 9/125 single mode fiber. The included SSF™ fiber provides extreme durability and strength.

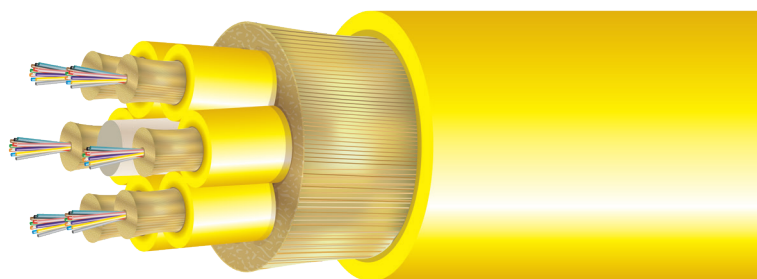


FEATURES AND BENEFITS

- High mechanical strength, superior fatigue (nd = 30)
- Up to 10,000x the bend longevity of traditional fiber
- Integral SSF™ coating provides glass protection
- Increased safety due to incredible bend insensitivity
- Exclusive 250 µm Soft Peel acrylate

APPLICATIONS

- Inter-/Intra-building voice or data communication
- Installation in ducts or underground conduit
- UL listed type OFNP for installation in ducts, plenums and other spaces used as environmental air returns when installed in accordance with NEC article 770-51 (a) and 770-53(a)

3D VIEW

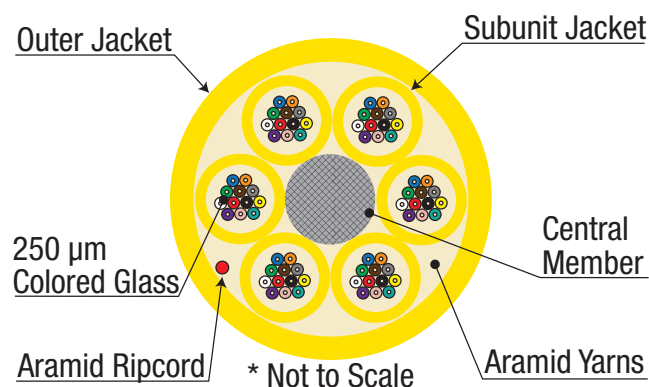

TYPICAL CROSS SECTION

PART NUMBER	FIBERS	DESCRIPTION	TYPE RISER/ PLENUM/LSZH	O.D.	WEIGHT (LB / 1000 FT)	MIN. BEND RADIUS, INSTALLATION	MIN. BEND RADIUS, OPERATION
24D9125SMOS2X	24 Fibers	24 Strand - 1000 ft Spool	X= R/P/L	8.2 mm	31.5	12.3 cm	8.2 cm
24D9125SMOS2X-B	24 Fibers	24 Strand - Cut to Order	X= R/P/L	8.2 mm	31.5	12.3 cm	8.2 cm
48D9125SMOS2X	48 Fibers	48 Strand - 1000 ft Spool	X= R/P/L	8.6 mm	51	12.9 cm	8.6 cm
48D9125SMOS2X-B	48 Fibers	48 Strand - Cut to Order	X= R/P/L	8.6 mm	51	12.9 cm	8.6 cm
72D9125SMOS2X	72 Fibers	72 Strand - 1000 ft Spool	X= R/P/L	10.5 mm	75.6	15.75 cm	10.5 cm
72D9125SMOS2X-B	72 Fibers	72 Strand - Cut to Order	X= R/P/L	10.5 mm	75.6	15.75 cm	10.5 cm
96D9125SMOS2X2	96 Fibers	96 Strand - 1000 ft Spool	X= R/P/L	9.3 mm	60.9	18.6 cm	9.3 cm
96D9125SMOS2X2-B	96 Fibers	96 Strand - Cut to Order	X= R/P/L	9.3 mm	60.9	18.6 cm	9.3 cm
144D9125SMOS2X2	144 Fibers	144 Strand - 1000 ft Spool	X= R/P/L	10.6 mm	76.2	21.2 cm	10.6 cm
144D9125SMOS2X2-B	144 Fibers	144 Strand - Cut to Order	X= R/P/L	10.6 mm	76.2	21.2 cm	10.6 cm

CLEERLINE TECHNOLOGY GROUP, LLC

8404 El Way Drive #2B, Missoula, MT 59808 USA & CAN: 866-469-2487 Fax 406.532.0060
Web: www.cleerlinefiber.com Copyright 2012 Cleerline Technology Group, LLC.

Date: 10/11/2019 Rev. 1.7

Int'l +1.406.541.9830 Int'l Fax 1.406.532.0060
All rights reserved. Subject to change without notice.

CONSTRUCTION

FIBER	
Fibers	24, 48, 72, 96, 144
Type	9/125 Single Mode OS2
Coating	250 μ m "Soft Peel" S-Type Coating
Color Coding	Per TIA/EIA 598C

JACKET	
Type	Riser Rated PVC (Indoor) Plenum Rated PVC + UV I/O / LSZH (Indoor/Outdoor)
Color	Yellow
Outer Diameter	Varies by Part Number
Subunit Diameter	3.0 mm/ 96, 144 Strand Subunit = 2.0 mm
Markings	Sequential Foot Markings
Strength Member	Kevlar (Plenum + water blocking yarns)

PHYSICAL DATA	
Storage Temperature Range	-40°C to +80°C
Operating Temperature Range	-20°C to +75°C
Max Tensile Load (Installation)	1000 N (225 lbf)
Max Tensile Load Long Term	500 N (112 lbf)
Min. Bend Radius, Unloaded	10 x O.D.
Min. Bend Radius, Operation	Varies by part number
Cable Outside Diameter, Nominal	Varies by part number
Subunit Bend Radius, Unloaded	1 x O.D.
Cable Package	1000 ft Reel or customer request, spooled
Rating	FT4 - Riser / FT6-Plenum / LSZH
Crush Resistance (TIA/EIA 455-41A)	100 kgf / mm
Impact Resistance (TIA/EIA 455-25B)	1500 impact cycles
Flexing @ 90 degrees (TIA/EIA 455-104A)	2000 flexing cycles

ENVIRONMENTAL CHARACTERISTICS	
Temperature Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation	-40°C to + 85°C
Watersoak Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation at 20°C for 30 days	
Damp Heat Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation at 85°C, 85% R.H., 30 days	
Dry Heat Dependence, 1310 nm and 1550 nm	≤ 0.05 dB / km
Induced Attenuation at 85°C, 30 days	

PHYSICAL CHARACTERISTICS		
Central Strength Member (if applicable)	Fiber-Reinforced Plastic w/ Flame Retardant PVC coating	
Core / Hybrid Cladding Concentricity Error	≤ 0.5 μ m	
Hybrid Cladding Diameter	125 ± 0.7 μ m	
Hybrid Cladding Non-Circularity Error	$\leq 1.0\%$	
Soft Peel Jacket Identifier	250 ± 0.7 μ m	
Coating Strip Force	≤ 100 g	
Fiber Curl	≥ 2 m	
Proof Test	100 kpsi	
Dynamic Fatigue 23°C, 41% R.H.	> 30 nD	
Bend Induced Attenuation, 1550 nm	1 turn around 10 mm radius	≤ 0.3 dB
	10 turns around 15 mm radius mandrel	≤ 0.03 dB
Bend Induced Attenuation, 1625 nm	1 turn around 10 mm radius	≤ 1.0 dB
	10 turns around 15 mm radius mandrel	≤ 0.2 dB

OPTICAL CHARACTERISTICS		
Attenuation Coefficient	1310 nm	≤ 0.35 dB/km
	1550 nm	≤ 0.21 dB/km
Mode Field Diameter	1310 nm	8.6 ± 0.4 μ m
	1550 nm	9.7 ± 0.5 μ m
Cable Cut-off Wavelength	≤ 1260 nm	
Zero Dispersion Wavelength	1310 nm - 1324 nm	
Zero Dispersion Slope	0.092 ps / nm ² · km	

BACKSCATTER CHARACTERISTICS		
Attenuation Directional Uniformity	≤ 0.03 dB/km	
Attenuation Uniformity	≤ 0.05 dB/km	
Group Index of Refraction	1310 nm	1.467
	1550 nm	1.468

COMPLIANCE	
UL Listed Type OFNR, CSA FT4, IECA S-83-596 & OFNP, CSA FT6 / IECA S-104-696. LSZH Listed CPR TBD. DoP Available on Request. RoHS Compliant Directive 2011/65/EU	
 	