

Product Data Sheet


☎ 1-888-452-HANA (4262) ✉ info@hanawireless.com

✉ 9465 Southampton Pl, Boca Raton, FL 33434, USA



Model: HW2-N18-1HF

18x16x8 Inch Weatherproof Enclosure with 120 Vac Mounting Plate, Thermostat Controlled Heating & Cooling System

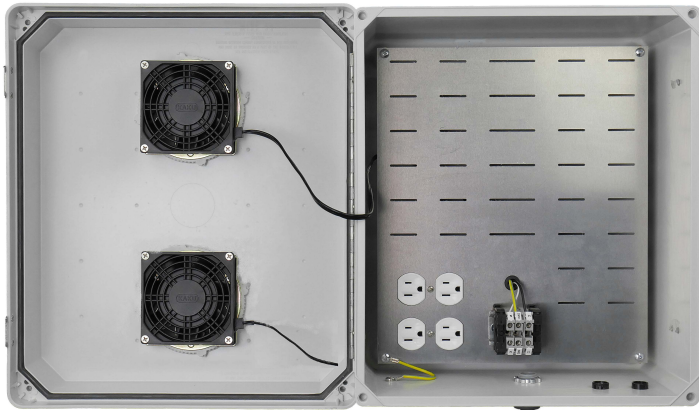

Features

- Molded Fiberglass Reinforced Polyester (FRP)
- Stainless steel quick-release latches with padlock hasps
- NEMA Type 3R, 3RX / IP24 rated, fully gasketed lid
- Integral mounting flange, mast mounting option
- Aluminum mounting plate with 120 Vac outlets, thermostat-controlled fan/heater, patented (US8014157) slotted accessory mounting design

Applications

- Remote wireless LAN Wi-Fi equipment installations
- Indoor and outdoor installations
- Rapid deployment and hotspot installations
- Harsh and corrosive environments
- Protection of equipment from theft and damage

Specifications

Material	FRP
Color	Tool Gray – RAL 7035
Voltage Vac	120
Heater F° (C°)	140 (60) PTC-Type
Heat Temperature ON/OFF F° (C°)	40 (4) +/-5 / 60 (15) +/-3
Fan Power Watt	12
Fan Temperature ON/OFF F° (C°)	100 (38) +/-3 / 70 (21) +/-5
Mounting Plate Dimensions in (mm)	16.8 (426) x 14.8 (375) x 0.1 (2.5)
Mounting Plate Material	Anodized Aluminum
Weight lb (kg)	21.8 (9.9)
Outside Dimensions, Max in (mm)	19.5 (495) x 17.5 (444) x 10.0 (254)
Inside Dimensions in (mm)	17.7 (449) x 15.7 (399) x 8.5 (216)
Flame Rating	UL 94-5V
RoHS	Compliant
Environmental Rating NEMA - IP	3R, 3RX - 24
Cable Feed	1/2in Conduit Connector

Package Specifications

Package Quantity	1 per Carton
Length in (mm)	20.0 (508)
Width in (mm)	20.0 (508)
Depth in (mm)	20.0 (508)
Weight lb (kg)	22.3 (10.1)



Wireless That Works