

EX[®] Universal BNC Compression Connectors

Series 6, 59 & Headend

The EXBNC Series is a universal compression connector designed for use with RG6 60% through Quad Cable (EXBNC6), Belden 9167 Head End Cable / RG59 60% through Quad (EXBNC9167) or CommScope F59HEC-2 / Times Fiber 02240V/02241V Head End Cable (EXBNCHE).


Specifications

Bandwidth	0 MHz to 1 GHz
Impedance	75 Ohms (nominal)
Return Loss	Minimum -30 dB to 1 GHz
Shielding Effectiveness	-80 dB minimum
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-40° C to 60° C)
Cable Retention	50 lbs (22.73 kg) minimum

Meets or Exceeds all SCTE Specifications



Features & Benefits

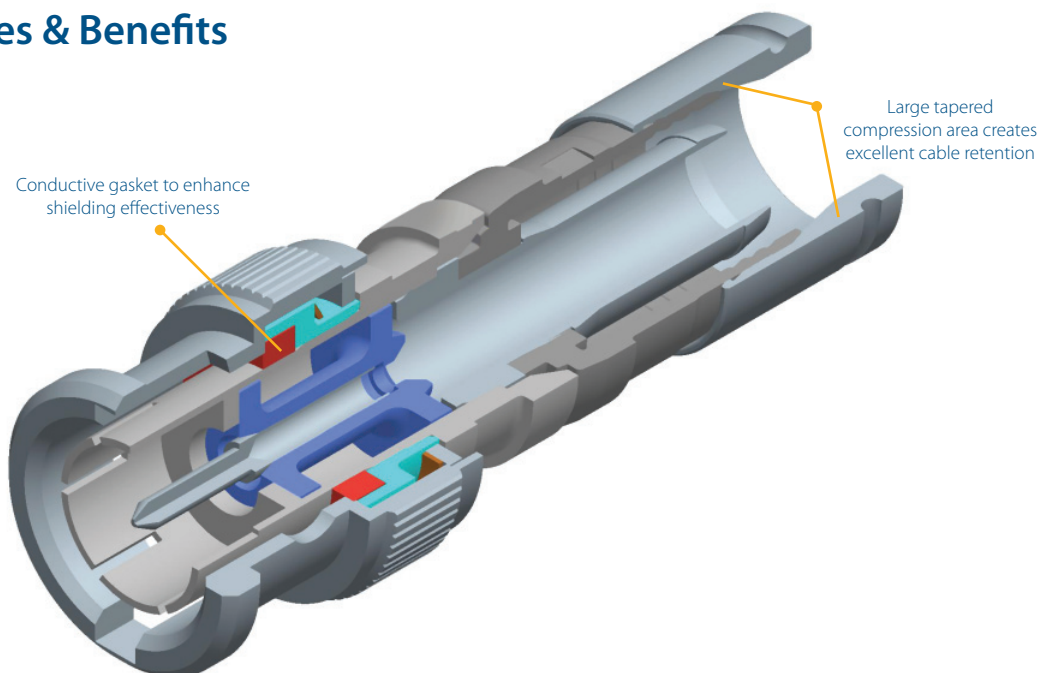

Application



EX® BNC Connectors for Headend applications

EX® Series Universal BNC Compression Connectors: Series 6, 59 & Headend



Part Numbers

EXBNC6	EX® Universal compression connector, BNC, series 6 cable
EXBNC9167	EX® Universal compression connector, BNC, Belden 9167 headend cable and RG59 60% - quad
EXBNCHE	EX® Universal compression connector, BNC, Commscope and Times Fiber headend cable

CAT-MULTIMEDIA-PPC



LDT596-250



Preparation & Installation Tools

Compression Tool	CAT-MULTIMEDIA-PPC	
¼" – ¼" universal drop cable preparation tool	LDT596-250	DDT59611