


SSF-LWM-SOLID-WL / NL-E8 Installation

Wall Mount Enclosure - Solid Door, Optional Lock



FEATURES

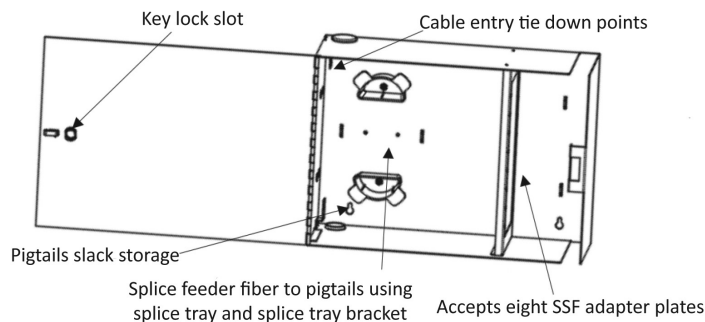

Description

Wallmount fiber distribution unit designed to support patching and splicing in one unit. The enclosure has 8 adapter panel positions, allowing for a wide variety of fiber termination connector types. Two compartments separate the network terminations from the distribution terminations and the unit has a single outer door with optional key lock.

INSTALLATION

The SSF-LWM-SOLID-WL-E8/SSF-LWM-SOLID-NL-E8 is designed for indoor installation. It can accept up to eight SSF adapter plates.

1. Select a vertical indoor wall surface with easy access and adequate clearance from other fixtures and power circuits. Installation location should be near a suitable earth ground.
2. Utilize a plywood backer board or fastener anchors as appropriate to the install surface.
3. Mark and install appropriate wall hanging hardware and secure the unit.

